


PIXIS Range

MINI PIXIS




MINI PIXIS is a high intensity LED generator designed to replace 35W halogen devices. The natural convection cooling system of Mini Pixis does not generate any disturbance making it a fully silent system. This maintenance free and energy saving LED generator will enable costs reduction.

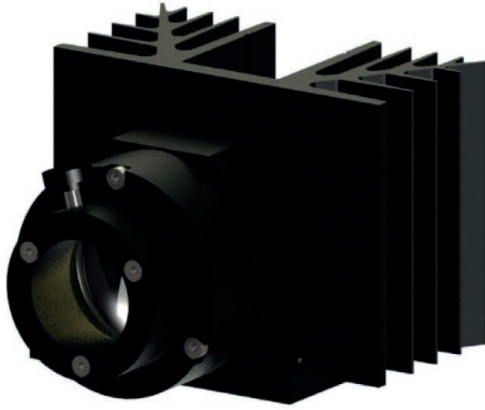


**MANUFACTURING
DESIGN**

Caractéristiques techniques

Light source type	LED
Led Power Rating	15W
Fiber optic beam output	Ø 30 mm
Color temperature	3 000 K - 4 000K (SDCM 2)
Led nominal output	1 415 lm - 1 450 lm
CRI	97 mini
R9	> 90
Lumen maintenance L80B10	70 000 operating hours to 25°
Dimming/Control	Potentiometer / 1-10v
Thermal dissipation	Cooling mode
Housing materials	Body : aluminium
Finish	Anodized aluminium black
Weight	0,800 Kg

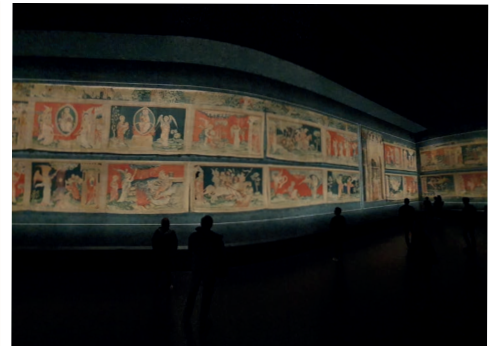

Chateau d'Angers - FRANCE - Galerie Tapissier de l'Apocalypse.
©SPX Lighting



SPX Lighting - Offices : 10 rue des Marronniers 94 240 L'Hay Les Roses - France.

Factory : Zac des Coinchettes - 36 100 Issoudun - France.

Contacts +33 01 82 33 02 80 - contact@spx-lighting.com - www.spx-lighting.com

All rights reserved. Partial or complete reproductions is prohibited unless written permission of SPX Lighting. Information contained in this document does not contractually bind SPX Lighting. Despite the care SPX Lighting brings to the accuracy and precision of the present information, the responsibility of SPX Lighting can not be sought in case of inaccurate information. SPX Lighting reserves the right to change this information at any time without prior notice. SPX Lighting cannot be held liable for the consequences of the use of the present document. This publication does not imply any transfer of intellectual property rights.





Date of publication February 2023.

VERSION 23A



Mini Pixis

Dimensions

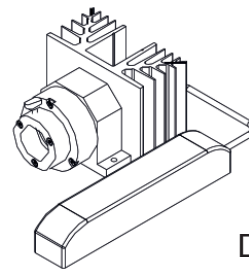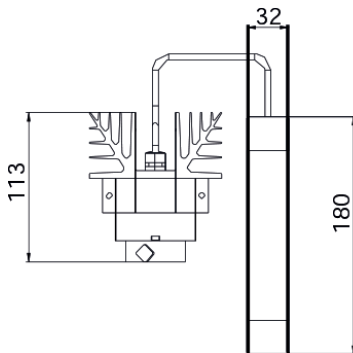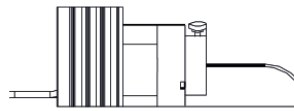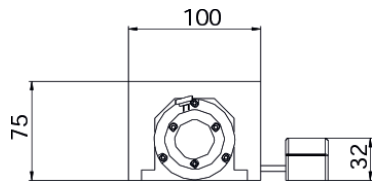

Dimensions in mm

Items references

Power Supply	Control	Power Consumption	3 000K	4 000K
Remote and cabled	Fixed	15 W	GEL00013	GEL00006
Remote and cabled	1-10V	15 W	GEL00014	GEL00008
Remote and cabled	Potentiometer	15 W	GEL00015	GEL00010

Accessories

- Ø 25 mm tip adaptor (factory fitted)
- Ø 22 mm tip adaptor
- Other diameters tips adaptor : on demand
- Glass/ Filter holder



SPX Lighting - Offices : 10 rue des Marronniers 94 240 L'Hay Les Roses - France.

Factory : Zac des Coinchettes - 36 100 Issoudun - France.

Contacts +33 01 82 33 02 80 - contact@spx-lighting.com - www.spx-lighting.com

All rights reserved. Partial or complete reproductions is prohibited unless written permission of SPX Lighting. Information contained in this document does not contractually bind SPX Lighting. Despite the care SPX Lighting brings to the accuracy and precision of the present information, the responsibility of SPX Lighting can not be sought in case of inaccurate information. SPX Lighting reserves the right to change this information at any time without prior notice. SPX Lighting cannot be held liable for the consequences of the use of the present document. This publication does not imply any transfer of intellectual property rights.

Date of publication February 2023.

VERSION 23A

